

Part Numbers

Fixture

1030 - AXIS 250

Lamp

L-MSD250 - Phillips MSD250

Flight Case

P-1030DUALCASE

Mechanical Specifications

Pan: 530° **Tilt:** 280°
DMX Connectors: 3-pin XLR connectors
Reflector: Glass reflector with cold mirror coating
Thermal: Maximum ambient temperature 40° C
 Maximum surface temperature 80° C
Fastening System: 2 clamp placement attachments

Fixture	Packaged for Shipping
Size: 16.75"L x 16"W x 20.5"H Weight: 52 lbs	Size: 20"L x 19.25"W x 22.25"H Weight: 61.60 lbs



Electrical Specifications

Lamp:	NSK/2	MSD250/2 (optional)
Light output:	12,000 ANSI lumen	12,000 ANSI lumen
Lamp life:	3,000 hours	3,000 hours
Color temperature:	8,000 K	6,200 K

Power consumption: 120V 50/60 Hz

Base: GY-9.5

Ballast: Magnetic

Electromechanical Effects

Focus: Motorized focus


Prism: 3-Facet prism rotating in both directions at different speeds

Dimmer / Shutter: Full range dimming and variable strobe effect

MEGA^{LITE}




Color

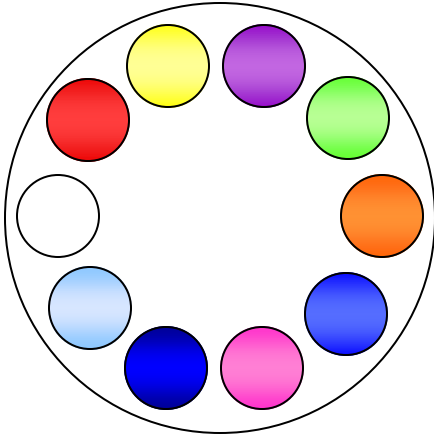

- 1: Open
- 2: Red
- 3: Yellow
- 4: Purple
- 5: Light Green
- 6: Orange
- 7: Blue
- 8: Magenta
- 9: Dark Blue
- 10: Light Blue

Gobo

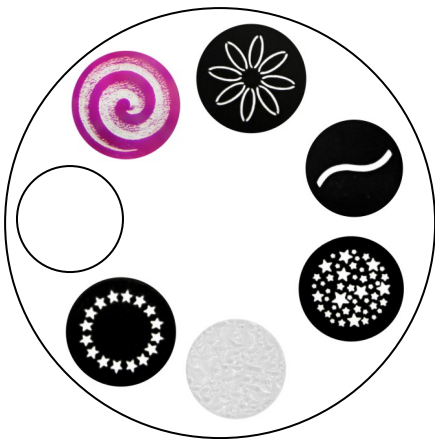

- 1: Open
- 2: Magenta Swirl
- 3: Daisy
- 4: Swivel
- 5: Stars
- 6: Diffusion
- 7: Circular Stars

Dichroic Glass Gobo:

Diameter 27 mm

Image 24 mm

Thickness 4 mm max

DMX Channels

Channel	Function	Channel	Function	Channel	Function
1	Pan	7	Color Wheel	13	Prism Rotation
2	Tilt	8	Gobo Wheel	14	Focus
3	Pan Fine	9	Gobo Rotation		
4	Tilt Fine	10	Shutter		
5	Pan/Tilt Speed	11	Dimmer		
6	Control	12	Prism		

MEGALITE

